



**VATS**  
**(Vehicle Anti-Theft System)**  
**Authorization Module**  
**(112100000)**

**Applications: 2011-2016 GM 6.6L Duramax**

**DISCLAIMER OF LIABILITY**

This agreement sets forth the terms and conditions for the use of this product. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions. Pacific Performance Engineering Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for the product's proper use and service. The buyer hereby waives all liability claims. The Buyer hereby acknowledges no reliance on the Seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence. The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment. The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt contact the manufacturer. The Buyer is solely responsible for all warranty issues from the manufacturer.

**LIMITATION OF WARRANTY**

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer.

The Warranty is limited to one (1) year from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller. Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund. The installation of this product indicates that the buyer has read and understands this agreement and accepts its terms and conditions.



# VATS Wiring Instructions:

- Red Wire - "T" into LML Ignition Wire (Blue Connector Pin 48)
- Black Wire - "T" into LML Ground Wire (Black Connector Pin 17)
- Yellow Wire - "T" into LML GMLAN+ Wire (Blue Connector Pin 66)
- Green Wire - "T" into LML GMLAN- Wire (Blue Connector Pin 46)

**NOTE!** - If any functional issues are encountered, the resistance of the GMLAN verified.

With the battery disconnected, use a DVOM (digital volt/ohm meter) to measure the resistance between the ECM GMLAN+ and GMLAN- (Pin 66 to Pin 46). This resistance should be 60 Ohms. If the resistance is 120 Ohms an additional resistor will need to be added across the GMLAN+ to GMLAN- wires. A 120 Ohm resistor can be obtained at Radio Shack, Fry's Electronics or similar.

"T" one end of the resistor into the VATS Delete Yellow wire and "T" the other end into the VATS Delete Green Wire. Soldering is recommended, use good sealing heat shrink to protect the splice

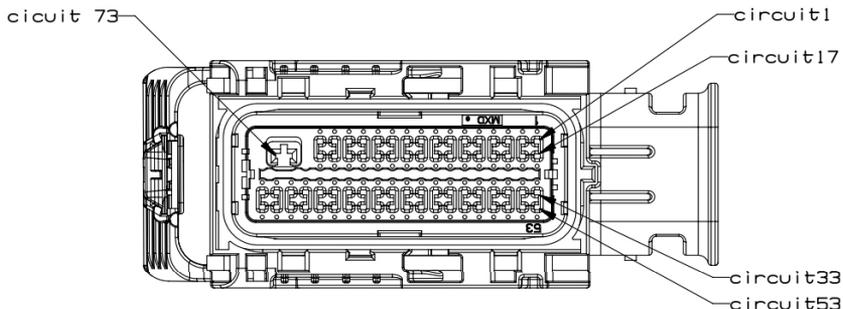

73 KCT HARNESS CONNECTOR ASSEMBLY  
 WIRE DRESS OPTION 0



**303 N. Placentia Avenue, Fullerton, CA 92831**

***PPEdiesel.com***

***sales@ppediesel.com***

**Phone: (714) 985-4825 Fax: (714) 985-9907**