




Pacific Performance Engineering, Inc.
www.ppediesel.com

Duramax 6.6L EGR False Code Eliminator Installation Guide

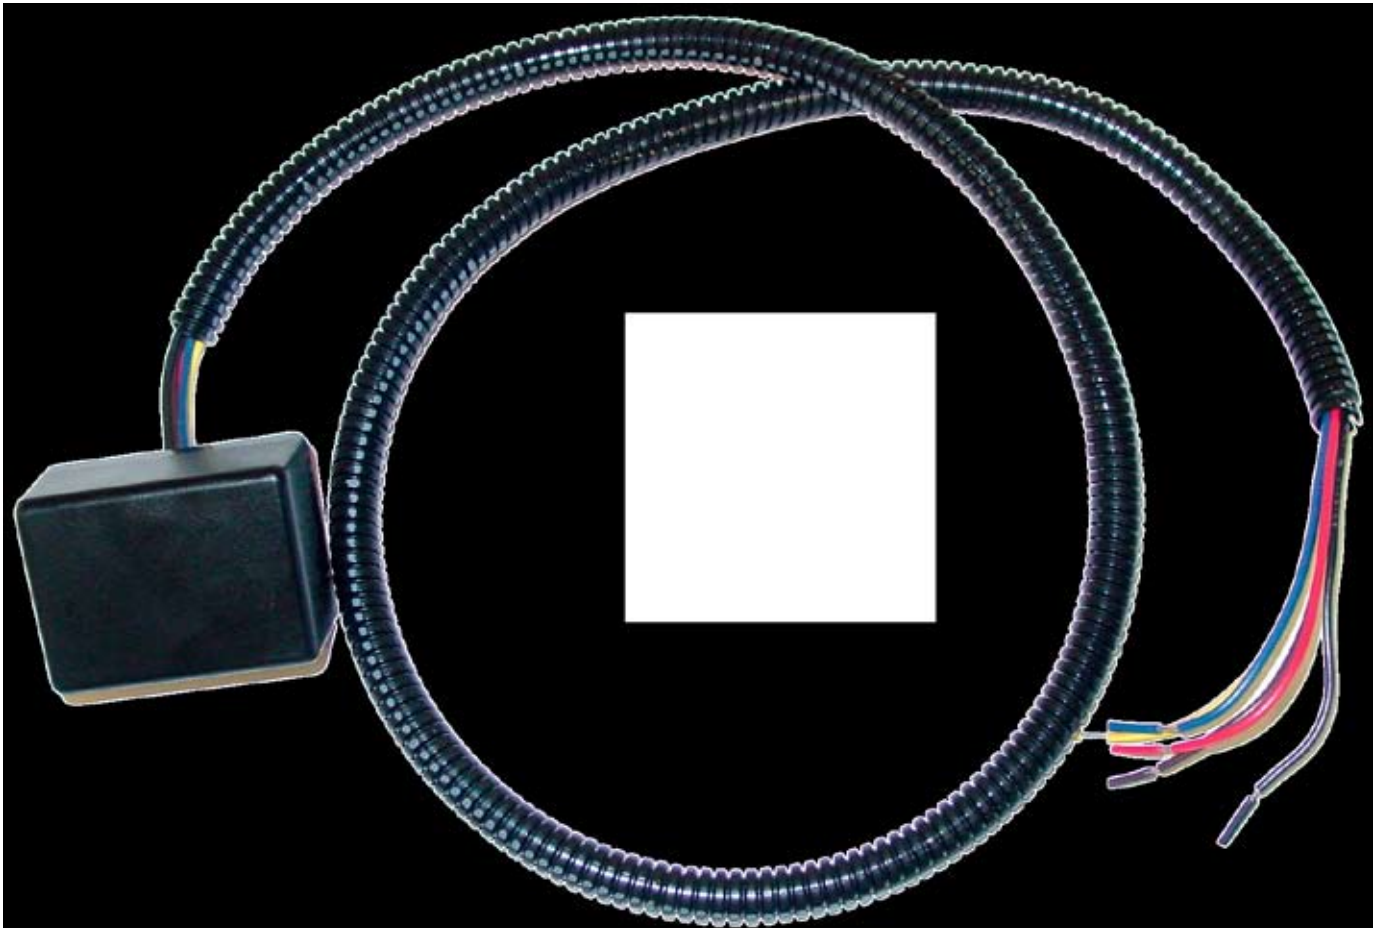

Eliminates 401 and 404 codes due to free flowing aftermarket exhaust systems



DISCLAIMER OF LIABILITY

This agreement sets forth the terms and conditions for the use of this product. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions.

Pacific Performance Engineering Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for this product's improper use and service. The Buyer hereby waives all liability claims.

The Buyer hereby acknowledges no reliance on the Seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence.

The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment.

The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer.

The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer.

The Warranty is limited to one (1) year from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller.

Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment.

In the event that the Buyer does not agree with this agreement; the Buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund.

The installation of this product indicates that the Buyer has read and understands this agreement and accepts its terms and conditions.



EGR False Code Eliminator Installation Guide

1. Remove the plastic intake tube from air box for easier access to the proper wiring harness.


2. Locate the main wiring harness which connect to both the Mass Air Flow Sensor (MAF) and the EGR Solenoid Module.



MAF



Locate wires to MAF & EGR Solenoid on passenger side front of engine. (may differ for 2006)

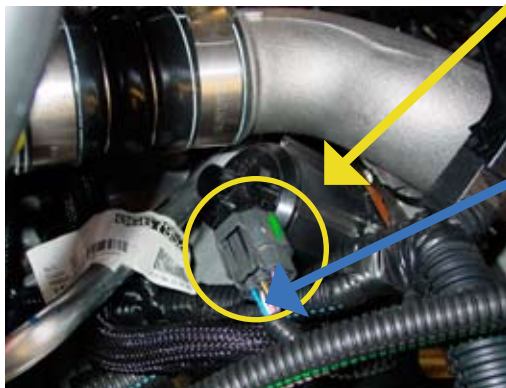

04.5 - 05 EGR Solenoid Module (passenger side)

EGR Connector location


Blue EGR wire here

Brown/
~~White~~ EGR wire here



2006 EGR Solenoid Module (passenger side)

3. Locate and remove the yellow wire from the split loom and cut it. Take the brown wire from the EGR False Code Eliminator and connect it to the MAF OUT wire. Take the yellow wire from the EGR False Code Eliminator and connect it to the MAF IN wire. Check the image for further clarification.

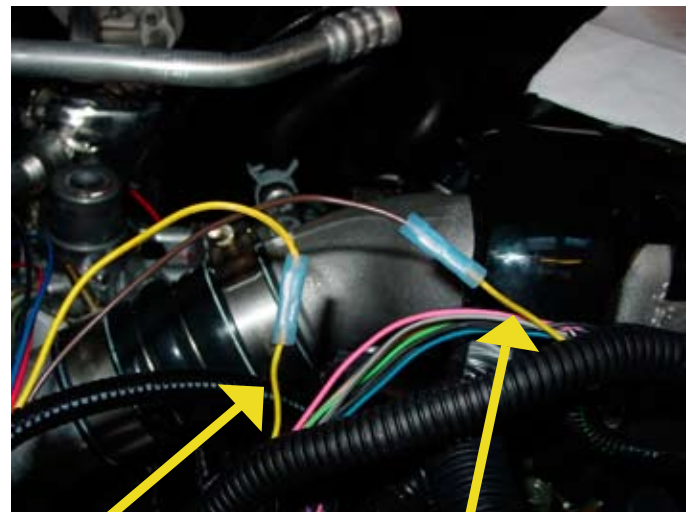


MAF IN (towards MAF)

MAF OUT (towards engine)
(Photo will Differ for the 2006 model)



EGR False Code Eliminator Installation Guide

4. Connect the BLUE (EGR False Code Eliminator) wire to the BLUE/WHITE at the EGR solenoid connector. **DO NOT** connect to the blue wire in the Mass Air Flow harness.

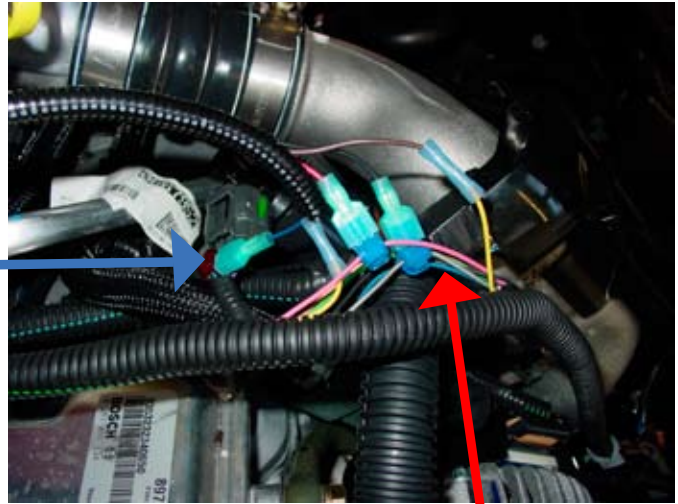

Blue EGR wire here

The wires connect as follows 2004.5 - 2005:


EGR False Code Eliminator Cable Colors

Stock Vehicle Wires

Black (ground)-----	Grey/Black
Red (power)-----	Rose
Blue (EGR)-----	Blue/White (connect at the EGR Solenoid Module Plug)
Yellow (MAF)-----	Yellow (MAF IN) - Towards MAF (Air Box)
Brown (MAF)-----	Yellow (MAF OUT) - Towards Engine

DO NOT connect anything to this blue wire

The wires connect as follows for 2006 Duramax engines:

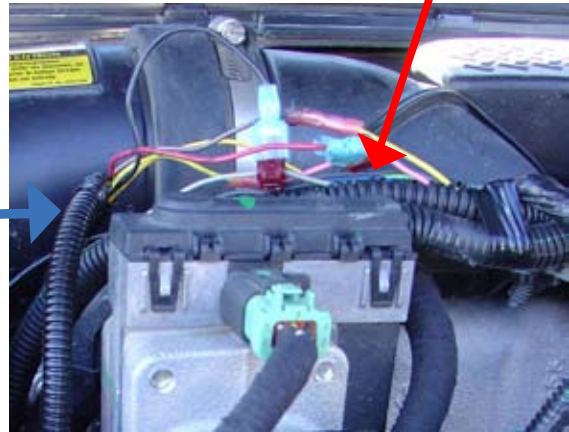

EGR harness goes here

EGR False Code Eliminator Cable Colors

Stock Vehicle Wires

Black (ground)-----	Grey
Red (power)-----	Rose
Blue (EGR)-----	Brown/White (connect at the EGR Solenoid Module Plug)
Yellow (MAF)-----	Yellow (MAF IN) - Towards MAF (Air Box)
Brown (MAF)-----	Yellow (MAF OUT) - Towards Engine

5. Place the EGR False Code Eliminator safely away from any heat source and reinstall the intake tube to the air box.



Pacific Performance Engineering, Inc.
303 N. Placentia Avenue
Suite D
Fullerton, CA 92831
www.ppediesel.com
Phone: (714) 985-4825
Fax: (714) 985-9907